

buddee

BLUETOOTH® DIGITAL ALARM CLOCK WITH USB PORT FOR PHONE CHARGING



USER MANUAL

Thank you for purchasing a Buddee Bluetooth® Digital Alarm Clock. For optimum performance and safety, read these instructions carefully before connecting, operating or adjusting this product. Refer to this manual for future reference.

INTRODUCTION

Wake up on time with the Bluetooth® Digital Alarm Clock from Buddee. This product features a large digital clock with alarm, FM radio and snooze functions so you will be up and ready for any occasion.

Wirelessly stream your music via Bluetooth®, play via 3.5mm auxiliary cable, or insert a TF / microSD card for playback. The large LED display makes checking the time easy no matter where you are in the room.



FEATURES

- Bluetooth® audio
- 10m wireless range
- USB charging
- AUX input
- Alarm
- TF card playback
- USB port for phone charging
- Large LED display
- FM radio
- Dual speakers

PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- Bluetooth® Digital Alarm Clock
- Micro-USB charging cable
- 3.5mm AUX cable
- User manual

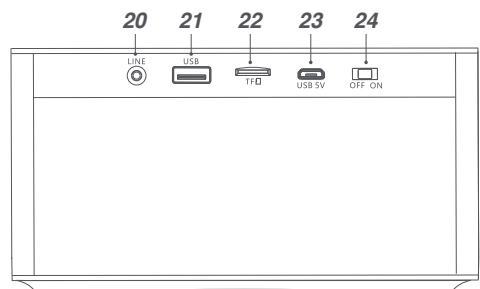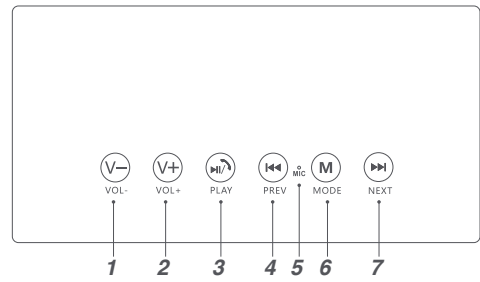

FUNCTIONS

- | | |
|--|----------------------------|
| 1. Increase volume | 12. Date indication |
| 2. Decrease volume | 13. Day indication |
| 3. Play/pause and answer call | 14. USB mode indication |
| 4. Previous button | 15. AUX mode indication |
| 5. Microphone | 16. Bluetooth® indication |
| 6. Mode (Toggle Bluetooth®, AUX line-in, FM radio and clock modes) | 17. FM radio indication |
| 7. Next button | 18. Power display |
| 8. Alarm sound indication | 19. Charging indication |
| 9. Alarm indication | 20. AUX line-in audio port |
| 10. TF card indication | 21. USB port |
| 11. Month indication | 22. TF card slot |
| | 23. Micro-USB port |
| | 24. Power switch (ON/OFF) |



UN38.3



Made in China

© Buddee Gear 2016. All rights reserved. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Buddee Gear Pty Ltd. is under license. Other trademarks and trade names are those of their respective owners.

POWERING ON

1. Slide the **power switch** to the **ON** position and the display will light up. The alarm clock will activate into **Bluetooth® mode**.

2. Slide the **power switch** to the **OFF** position to power down the alarm clock.

CHARGING

1. Connect the micro-USB end of the included cable into the charging port on the back of the alarm clock.

2. Connect the USB end with a powered USB source such as a computer, laptop or USB wall charger. The charging indicator will flash red. *A flashing charging indicator light means the alarm clock is low on battery.*

3. Once the device is fully charged the charging indicator will turn off.

NOTE: Please fully charge the alarm clock prior to first use.

ANSWER PHONE CALLS

1. To accept a phone call, firstly pair your mobile with the alarm clock via **Bluetooth®**. Once paired, simply press the **play button** located on the top of the alarm clock to accept an incoming call. Your voice will be delivered through the built in microphone.

2. To end the call, press the **play button** once more.

NOTE: You can also use the controls on your mobile phone.

BLUETOOTH® MODE

PAIRING A DEVICE AND PLAYING AUDIO

1. When activating **Bluetooth® mode** the LED display will flash, indicating the alarm clock is waiting to be paired. *When pairing remain within one metre of the device.*

2. In the **Bluetooth®** settings menu of the device you wish to pair, select **BD-ALMCLK-1** in the list of available **Bluetooth®** devices. If your device requires a password, enter **0000**. *Refer to the manual of your device for specific instructions on pairing and connecting Bluetooth® devices.*

3. Once pairing is successful, the LED display will stop flashing. Audio played through the connected **Bluetooth®** device will now be heard through the alarm clock.

4. Use the controls on your connected device to select and begin to play audio. To **play/pause** audio, **skip songs** or adjust the **volume** use the controls on the top of the alarm clock. You can also use the controls on your connected device.

TF / MICRO SD CARD MODE

1. Insert your TF or micro SD card into the slot located on the back of the alarm clock. Press the **mode button** until you reach the **TF card mode**. The TF indicator will light up on the LED display.

2. Use the controls located on the top of the alarm clock to **play/pause**, **adjust volume** or **skip songs** stored on your TF card.

AUX LINE-IN MODE

1. Connect a 3.5mm AUX cable to your alarm clock in the AUX port located on the back of the device. Press the **mode button** until you reach the **AUX Line-In mode**.

2. Begin playing audio through your connected AUX device and it will now be heard through the alarm clock speaker.

FM RADIO MODE

1. Press the **mode button** until you reach the **FM radio mode**.

2. Press the **play button** to search through radio stations automatically. The alarm clock will then save found radio stations as presets. You can skip through these preset stations by pressing the **previous button** and **next button**.

NOTE: For radio operation, ensure one end of the 3.5mm AUX cable (included) is attached to the back of the unit via the AUX Line-In port. The other end of the AUX cable does not need to be plugged in and acts as an aerial.

SETTING THE TIME AND DATE

1. Press the **mode button** until you reach **clock mode**.

2. Press the **next button** and the LED display will begin to flash. Keep pressing the **next button** again to sort between changing the **hour**, **minutes**, **month** and **weekday** information displayed on the alarm clock.

3. Use the **increase volume** and **decrease volume** buttons to set the time and date.

USING THE ALARM

1. Press the **mode button** until you reach **clock mode**.

2. Press the **previous button** and the LED display will begin to flash. Keep pressing the **next button** to sort between setting the **hour** and **minutes** for your alarm time.

3. Use the **increase volume** and **decrease volume** buttons to set the time. Once you have set your desired alarm time do not touch any buttons for approximately four seconds and the alarm clock will display the current time again. This means it has set successfully.

4. After setting your alarm, press the **play button** to toggle the alarm from **ON** and **OFF**.

TECHNICAL SPECIFICATIONS

Input: 5V

Output: 5W x 2

Speaker size: Φ 52mm

Impedance: 4 Ω 5W

Frequency: 100Hz - 18KHz

FM Frequency: 87.5 - 188MHz

AUX input: 3.5mm

Bluetooth® Version: 2.1+ESR

Battery Life: 4 hours at 80% volume